ZGS®

CABLE TIES & WIRING ACCESSORIES

WENZHOU SHIJI IMP.&EXP. CO.,LTD.

WWW.GROUPZGS.COM

ABOUT ZGS

ZHEJIANG ZHONGGU PLASTIC CO., LTD.& WENZHOU SHIJI IMP.&EXP. CO.,LTD.

Founded in

2015

ZHEJIANG ZHONGGU PLASTIC CO.,LTD..started in 2015
WENZHOU SHIJI IMP.&EXP. CO.,LTD. started in 2021.

Location

BUILDING B5,WEST INDUSTRIAL ZONE,FANGDOUYAN VILLAGE LIUSHI TOWN,YUEQING CITY,WENZHOU CITY, ZHEJIANG PROVINCE CHINA

WENZHOU SHIJI

Subsidiary corporation

Responsible for import and export business

Main Products

We specializes in manufacture and sales of high quality nylon cable ties featuring heat stabilized and cold weather resistant cable ties, along with other plastic products such as cable clips,expand plugs, spiral binding wrap,etc.

ABOUT

WENZHOU SHIJI IMP.&EXP. CO.,LTD.

Professional custom service

Quality control system

Rich experience in import and export trade

Company warehouse

Office environment

Exhibition

ABOUT

ZHEJIANG ZHONGGU PLASTIC CO., LTD.

Zhejiang Zhonggu Plastic Co., Ltd. is a new enterprise with modern production scale integrating scientific research, production and trade. The company covers an area of about 2,400 square meters and is located in Liushi Town, Wenzhou City, which enjoys the reputation of the capital of electrical appliances in China.
Our company specializes in the production of high-quality nylon cable ties, high and low temperature cable ties, stainless steel cable ties, and other plastic products, such as cable clips ,tie mount, sprial wrapping etc.

Applications

Rail Transportation
Machinery Manufacturing
Power Communication
Energy Industry

Shipping

Equipment

Warehouse

Certificates

Meets international testing standards

WENZHOU SHIJI IMP.&EXP. CO.,LTD.

Nylon Cable Tie

·Material: Made of UL approved polyamide nylon 66
·Fire rating: UL94V-2 Acid and corrosion resistant, good insulating properties, not easy to age, strong bearing capacity
·Applicable temperature range: -40℃-85℃
·Installation temperature range: -20℃ to 85℃
·Colours: Standard colours are natural, black and UV resistant black. Special colours can be made to order.

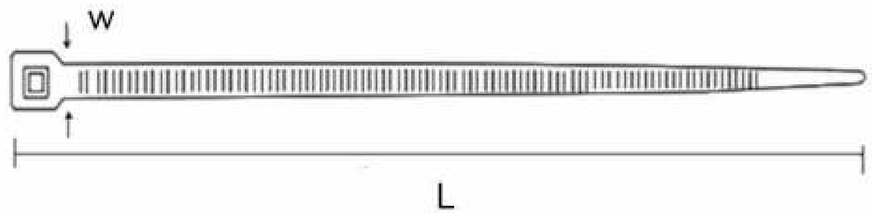



Max.Bundle Dia. E

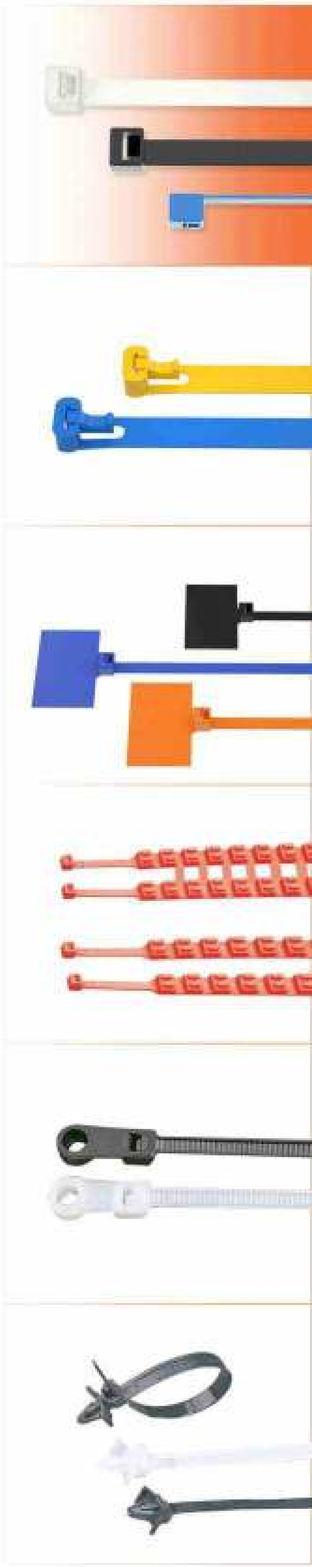

WENZHOU SHIJI IMP.&EXP. CO.,LTD.

Nylon Cable Tie

Item.no	Length		Width	Max.Bundle Dia.E	Min.loop Tensile Strength	
	Inch	mm	mm	mm	LBS	KGS
ZGS-1.8x80	2 3/16"	80	1.8	16	13	6
ZGS-1.8x100	4"	100	1.8	22	13	6
ZGS-1.8x120	2 3/4"	120	1.8	30	13	6
ZGS-2.0x150	6"	150	2.0	35	13	6
ZGS-2.0x200	8"	200	2.0	50	13	6
ZGS-2.5x80	2 3/16"	80	2.5	16	17	8
ZGS-2.5x100	4"	100	2.5	22	17	8
ZGS-2.5x120	2 3/4"	120	2.5	30	17	8
ZGS-2.5x150	6"	150	2.5	35	17	8
ZGS-2.5x200	8"	200	2.5	50	17	8
ZGS-2.7x150	6"	150	2.7	35	26	12
ZGS-2.7x200	8"	200	2.7	50	26	12
ZGS-2.7x250	10"	250	2.7	65	26	12
ZGS-2.7x300	11 5/8"	300	2.7	80	26	12
ZGS-3.0x150	6"	150	3.0	35	30	15
ZGS-3.0x200	8"	200	3.0	50	30	15
ZGS-3.0x250	10"	250	3.0	65	30	15
ZGS-3.0x300	11 5/8"	300	3.0	80	30	15
ZGS-3.3x200	8"	200	3.3	50	35	15
ZGS-3.3x250	10"	250	3.3	65	35	15
ZGS-3.3x300	11 5/8"	300	3.3	80	35	15
ZGS-3.3x350	13 3/4"	350	3.3	90	35	15
ZGS-3.6x150	6"	150	3.6	35	39	18
ZGS-3.6x200	8"	200	3.6	50	39	18
ZGS-3.6x250	10"	250	3.6	65	39	18
ZGS-3.6x350	13 3/4"	350	3.6	90	39	18
ZGS-3.6x370	14 1/2"	370	3.6	100	39	18
ZGS-3.9x400	15 3/4"	400	3.9	105	40	18
ZGS-3.9x450	17 3/4"	450	3.9	130	40	18
ZGS-3.9x500	19 11/16"	500	3.9	150	40	18
ZGS-4.8x200	8"	200	4.8	50	57	26
ZGS-4.8x250	10"	250	4.8	65	57	26
ZGS-4.8x300	11 5/8"	300	4.8	80	57	26
ZGS-4.8x350	13 3/4"	350	4.8	90	57	26
ZGS-4.8x370	14 1/2"	370	4.8	100	57	26
ZGS-4.8x400	15 3/4"	400	4.8	105	57	26
ZGS-4.8x450	17 3/4"	450	4.8	130	57	26
ZGS-4.8x500	19 11/16"	500	4.8	150	57	26
ZGS-4.8x650	25 9/16"	650	4.8	190	57	26
ZGS-5.1x200	8"	200	5.1	50	60	30
ZGS-5.1x250	10"	250	5.1	65	60	30
ZGS-5.1x300	11 5/8"	300	5.1	80	60	30
ZGS-5.1x350	13 3/4"	350	5.1	90	60	30
ZGS-5.1x400	15 3/4"	400	5.1	105	60	30
ZGS-5.1x500	19 11/16"	500	5.1	150	60	30
ZGS-7.6x200	8"	200	7.6	50	121	55
ZGS-7.6x250	10"	250	7.6	65	121	55
ZGS-7.6x300	11 5/8"	300	7.6	80	121	55
ZGS-7.6x350	13 3/4"	350	7.6	90	121	55
ZGS-7.6x400	15 3/4"	400	7.6	105	121	55

Nylon Cable Tie

Item.no	Length		Width	Max.Bundle Dia.E	Min.loop Tensile Strength	
	Inch	mm	mm	mm	LBS	KGS
ZGS-7.6x400	15 3/4"	400	7.6	105	121	55
ZGS-7.6x450	17 3/4"	450	7.6	130	121	55
ZGS-7.6x500	19 11/16"	500	7.6	150	121	55
ZGS-7.6x550	21 1/16"	550	7.6	160	121	55
ZGS-7.6x600	23 5/8"	600	7.6	170	121	55
ZGS-8.8x400	15 3/4"	400	8.8	105	176	80
ZGS-8.8x450	17 3/4"	450	8.8	130	176	80
ZGS-8.8x500	19 11/16"	500	8.8	150	176	80
ZGS-8.8x550	21 1/16"	550	8.8	160	176	80
ZGS-8.8x600	23 5/8"	600	8.8	170	176	80
ZGS-8.8x650	25 9/16"	650	8.8	190	176	80
ZGS-8.8x720	28"	720	8.8	205	176	80
ZGS-8.8x760	30"	760	8.8	225	176	80
ZGS-8.8x800	32"	800	8.8	243	176	80
ZGS-8.8x920	36"	920	8.8	265	176	80
ZGS-8.8x1220	48"	1220	8.8	340	176	80
ZGS-12x300	11 5/8"	300	12	80	240	110
ZGS-12x500	19 11/16"	500	12	150	240	110
ZGS-12x600	23 5/8"	600	12	170	240	110
ZGS-12x650	25 9/16"	650	12	190	240	110
ZGS-12x700	28"	700	12	200	240	110
ZGS-12x760	30"	760	12	225	240	110
ZGS-12x800	32"	800	12	243	240	110
ZGS-12x860	34"	860	12	253	240	110
ZGS-12x900	36"	900	12	265	240	110

ZGS-7.6x450	17 3/4"	450	7.6	130	121	55
ZGS-7.6x500	19 11/16"	500	7.6	150	121	55
ZGS-7.6x550	21 1/16"	550	7.6	160	121	55
ZGS-7.6x600	23 5/8"	600	7.6	170	121	55
ZGS-8.8x400	15 3/4"	400	8.8	105	176	80
ZGS-8.8x450	17 3/4"	450	8.8	130	176	80
ZGS-8.8x500	19 11/16"	500	8.8	150	176	80
ZGS-8.8x550	21 1/16"	550	8.8	160	176	80
ZGS-8.8x600	23 5/8"	600	8.8	170	176	80
ZGS-8.8x650	25 9/16"	650	8.8	190	176	80
ZGS-8.8x720	28"	720	8.8	205	176	80
ZGS-8.8x760	30"	760	8.8	225	176	80
ZGS-8.8x800	32"	800	8.8	243	176	80
ZGS-8.8x920	36"	920	8.8	265	176	80
ZGS-8.8x1220	48"	1220	8.8	340	176	80
ZGS-12x300	11 5/8"	300	12	80	240	110
ZGS-12x500	19 11/16"	500	12	150	240	110
ZGS-12x600	23 5/8"	600	12	170	240	110
ZGS-12x650	25 9/16"	650	12	190	240	110
ZGS-12x700	28"	700	12	200	240	110
ZGS-12x760	30"	760	12	225	240	110
ZGS-12x800	32"	800	12	243	240	110
ZGS-12x860	34"	860	12	253	240	110
ZGS-12x900	36"	900	12	265	240	110

High Temperture Resistant Cable Ties

- Material: Made of UL approved nylon 66 with UL94V-2 fire rating acid resistant, corrosion resistant, good insulating properties not easy to age, strong bearing capacity.
- Applicable temperature range:-20℃—120℃
- Installation temperature range: -10℃—120℃
  UV resistant black.

Item.no	Length		Width	Max.Bundle Dia. E	Min.loop Tensile Strength	
	Inch	mm	mm	mm	LBS	KGS
ZGS-3x100	4″	100	2.5	22	18	8
ZGS-4x150	6″	150	3.6	35	40	18
ZGS-4x200	8″	200	3.6	53	40	18
ZGS-5x200	8″	200	4.8	53	50	22
ZGS-5x250	10″	250	4.8	65	50	22
ZGS-5x300	11 5/8″	300	4.8	82	50	22
ZGS-5x380	15″	380	4.8	105	50	22
ZGS-8x300	11 5/8″	300	7.6	80	120	55
ZGS-8x350	13 3/4″	350	7.6	90	120	55
ZGS-8x400	15 3/4″	400	7.6	105	120	55
ZGS-8x500	19 11/16″	500	7.6	145	120	55

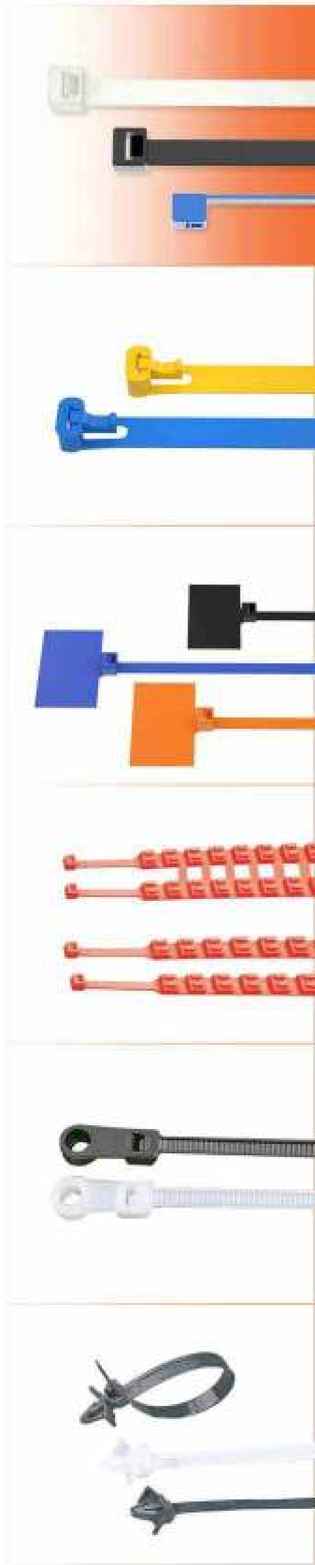

Cold Resistant Cable Ties

- Material: Made of UL approved nylon 66 with UL94V-2 fire rating acid resistant, corrosion resistant, good insulating properties not easy to age, strong bearing capacity.
- Applicable temperature range:-50℃—85℃
- Installation temperature range: -40℃—85℃ UV resistant black.

Item.no	Length		Width	Max.Bundle Dia. E	Min.loop Tensile Strength	
	Inch	mm	mm	mm	LBS	KGS
ZGS-3x100	4″	100	2.5	22	18	8
ZGS-4x150	6″	150	3.6	35	40	18
ZGS-4x200	8″	200	3.6	53	40	18
ZGS-5x200	8″	200	4.8	53	50	22
ZGS-5x250	10″	250	4.8	65	50	22
ZGS-5x300	11 5/8″	300	4.8	82	50	22
ZGS-5x380	15″	380	4.8	105	50	22
ZGS-8x300	11 5/8″	300	7.6	80	120	55
ZGS-8x350	13 3/4″	350	7.6	90	120	55
ZGS-8x400	15 3/4″	400	7.6	105	120	55
ZGS-8x500	19 11/16″	500	7.6	145	120	55

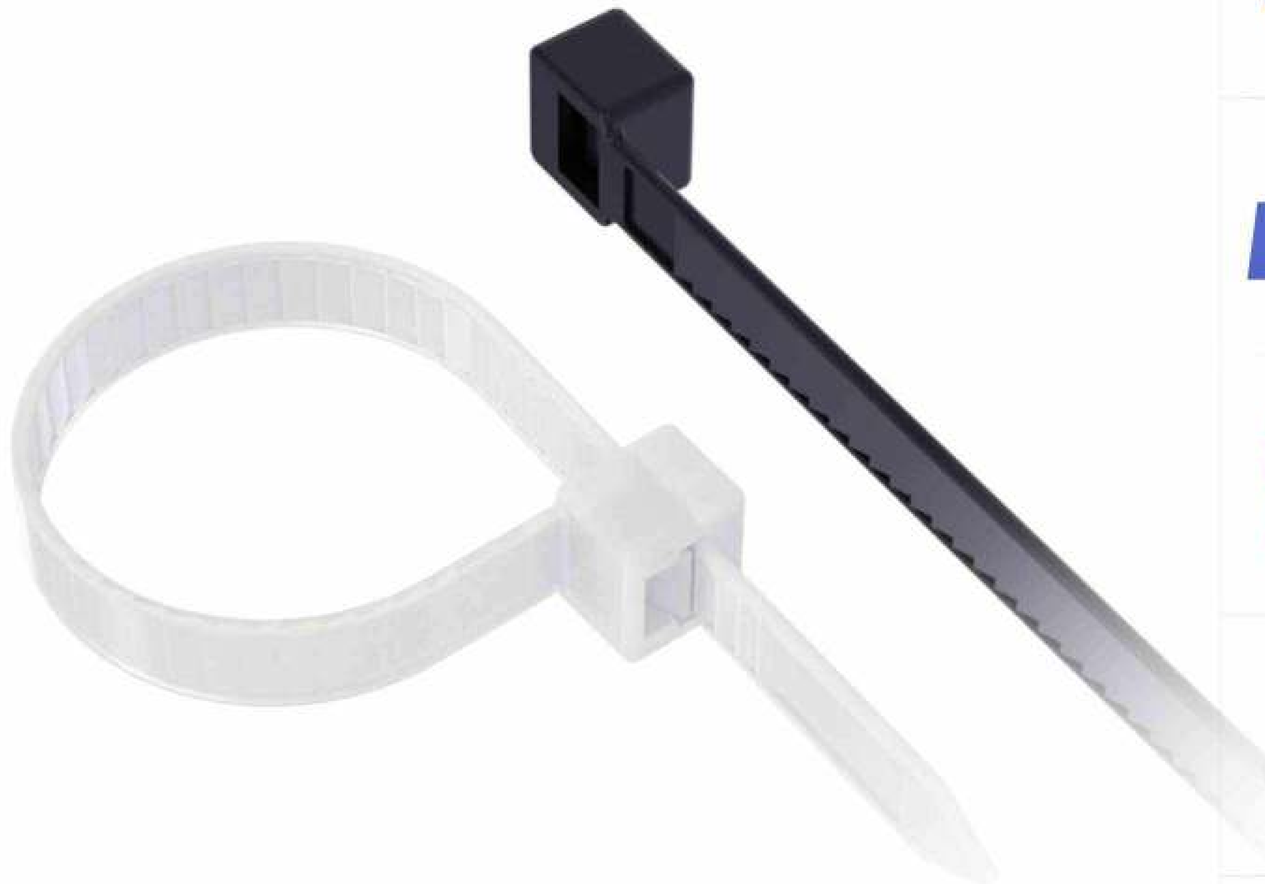

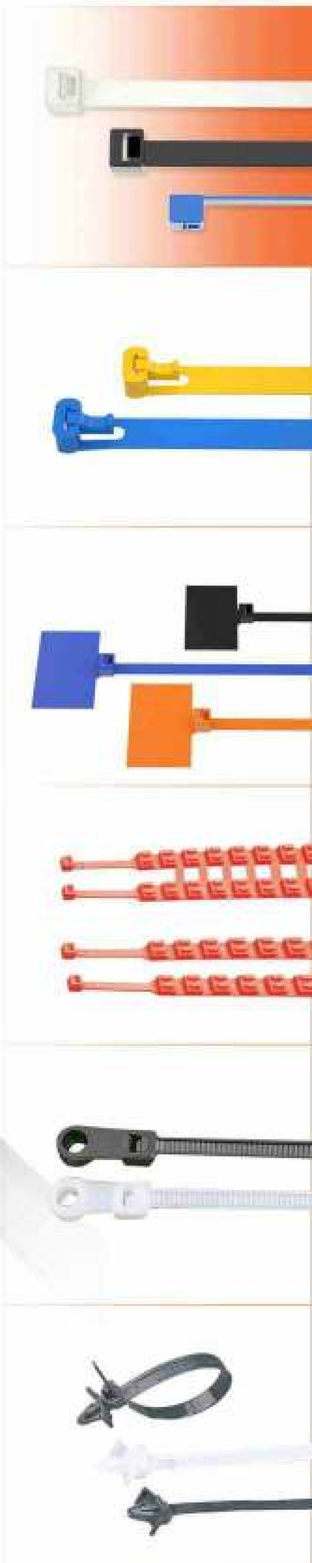

Releasable cable ties

- Material Nylon 66, 94V-2 certificated by UL. Acid & erosion control insulate well and not easy to aging tensile strong.
- Application temperature -40℃ to 85℃
- Installation temperature -20℃ to 85℃
- Color Natural, Black, UV black, other colors are available as requested.
- Feature Can be released for repeated use.

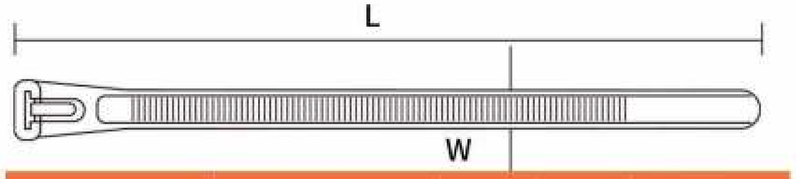

Item.no	Length		Width	Max.Bundle Dia.E	Min.loop Tensile Strength	
	Inch	mm	mm	mm	LBS	KGS
BCT-4×150	6″	150	3.6	50	18	16
BCT-5×150	6″	150	4.8	35	30	24
BCT-5×200	8″	200	4.8	50	30	24
BCT-5×300	11 5/8″	300	4.8	80	30	24
BCT-8×150	6″	150	7.5	35	120	45
BCT-8×200	8″	200	7.5	50	120	45
BCT-8×300	11 5/8″	300	7.5	80	120	45
BCT-8×350	13 3/4″	350	7.5	90	120	45
BCT-8×400	15 3/4″	400	7.5	105	120	45
BCT-8×450	17 3/4″	450	7.5	130	120	45
BCT-8×500	19 11/16″	500	7.5	150	120	45
BCT-8×600	23 5/8″	600	7.5	170	120	45

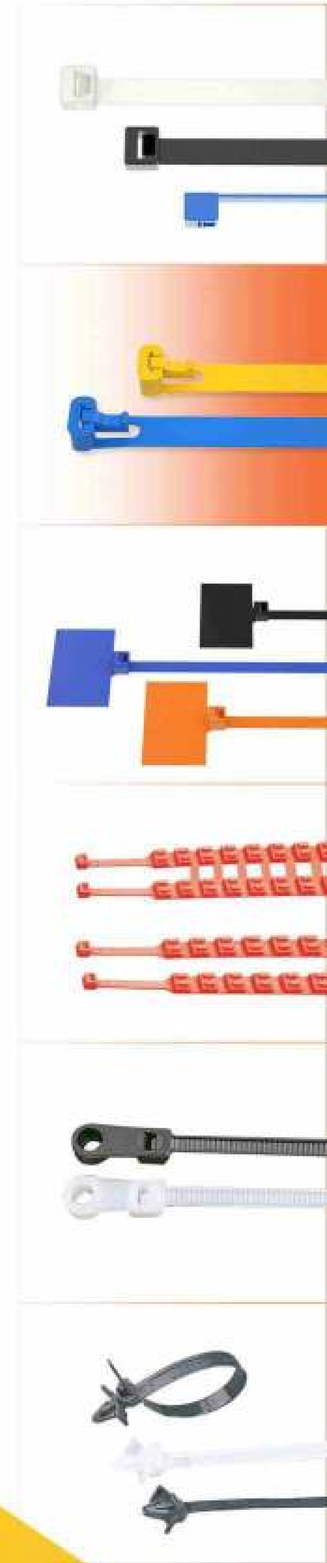

WENZHOU SHIJI IMP.&EXP. CO.,LTD.

Lable cable tie

·Material Nylon 66, 94V-2 certificated by UL. Acid & erosion control insulate well and not easy to aging tensile strong.
·Application temperature:-40℃ to 85℃
·Installation temperature:-20℃ to 85℃
·Color:Natural, Black,UV black, other colors are available as requested.
·Feature:The blank sign at the front of the ties can be marked.

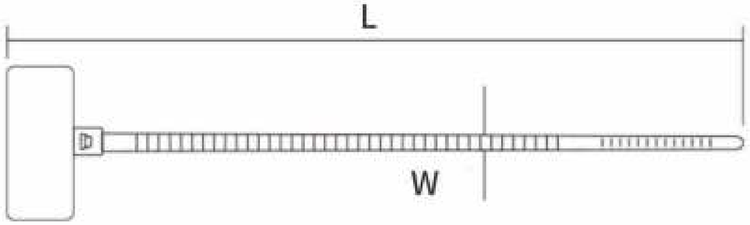

Item.no	Length		Width	Max.Bundle Dia. E	Min.loop Tensile Strength		Sticker Size
	Inch	mm	mm	mm	LBS	KGS	mm
MCT3×100	4″	100	2.5	22	18	8	25x8
MCT4×150	6″	150	2.5	22	40	12	21x10
MCT4×200	8″	200	3.0	22	40	12	25x8

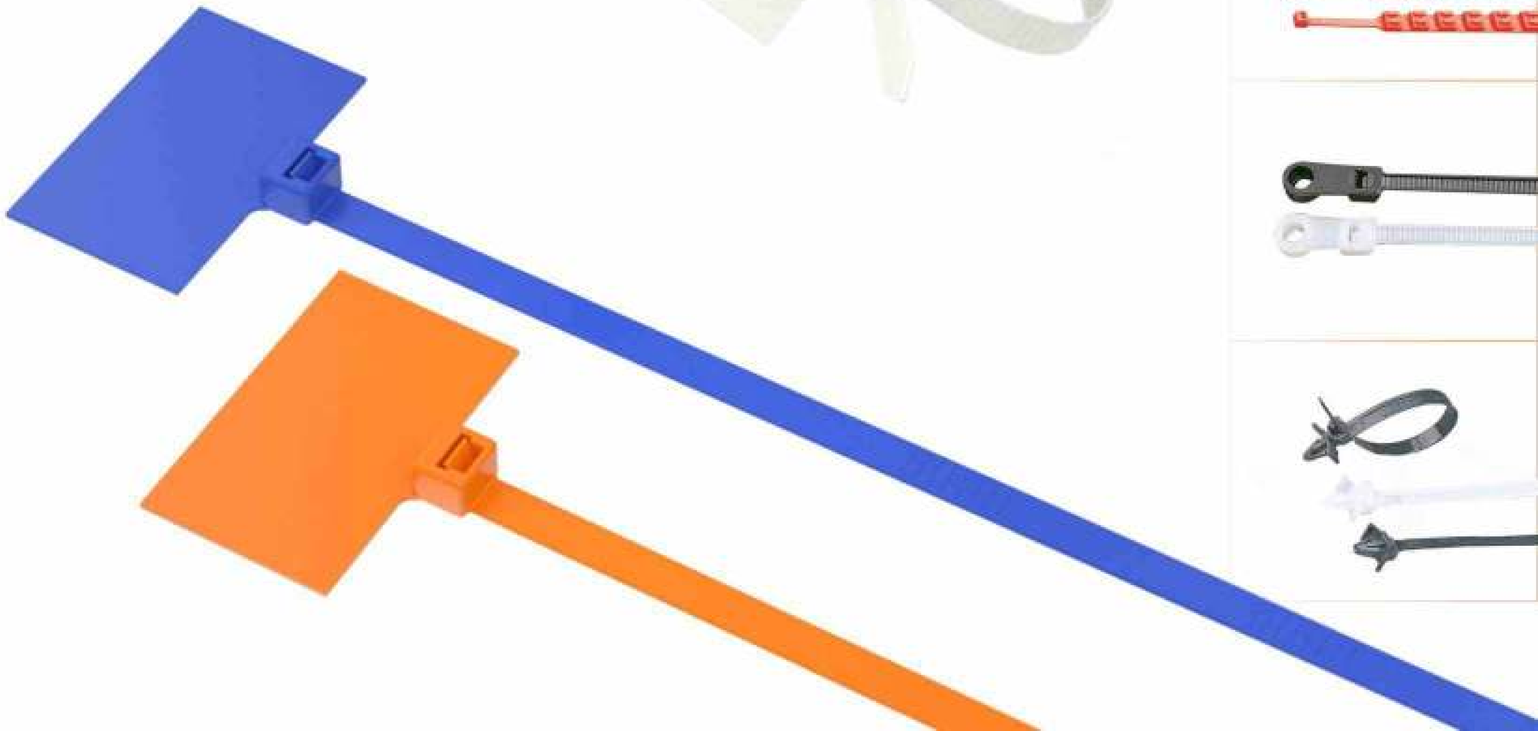

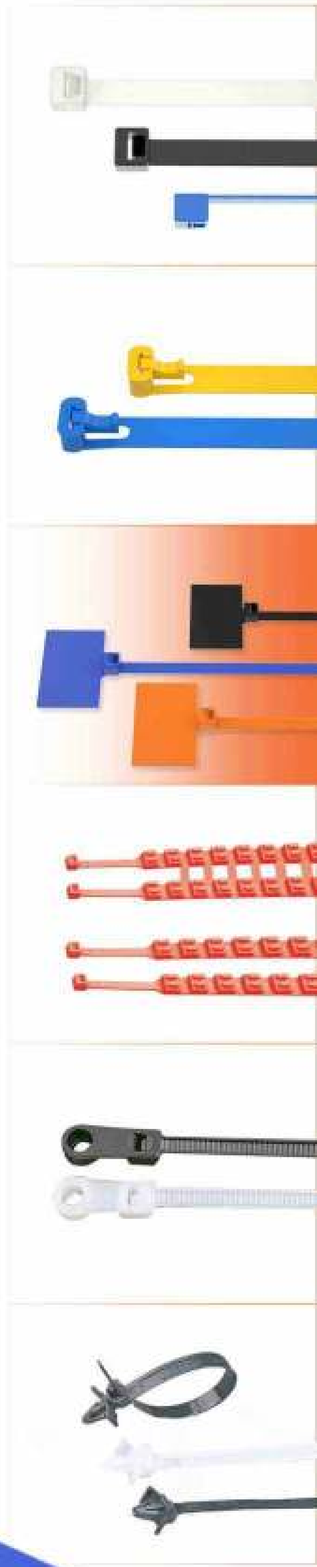

WENZHOU SHIJI IMP.&EXP. CO.,LTD.

Antiskid Ties

- Material: Modified Nylon, 94V-2 certificated by UL.

Acid & erosion control,insulate well and not easy to aging、tensile strong.

- Application temperature: -40℃ to 85℃
- Installation temperature: -20℃ to 85℃
- Features: Anti-skidding, wear - resisting,

easy operating, used upon icy roads and snowfield.

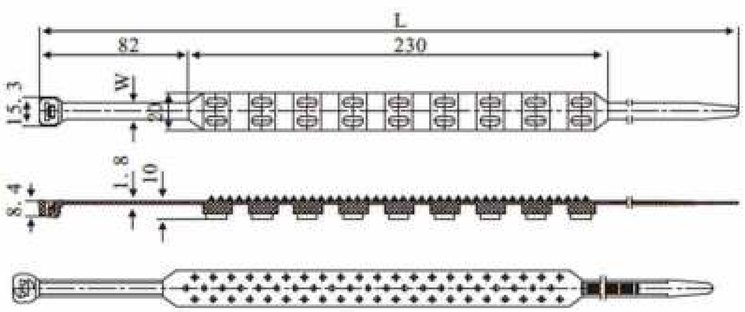

Item.no	Length		Width	Max.Bundle Dia. E	Min.loop Tensile Strength	
	Inch	mm	mm	mm	LBS	KGS
900AST	35 1/2"	900	12	251	175	80

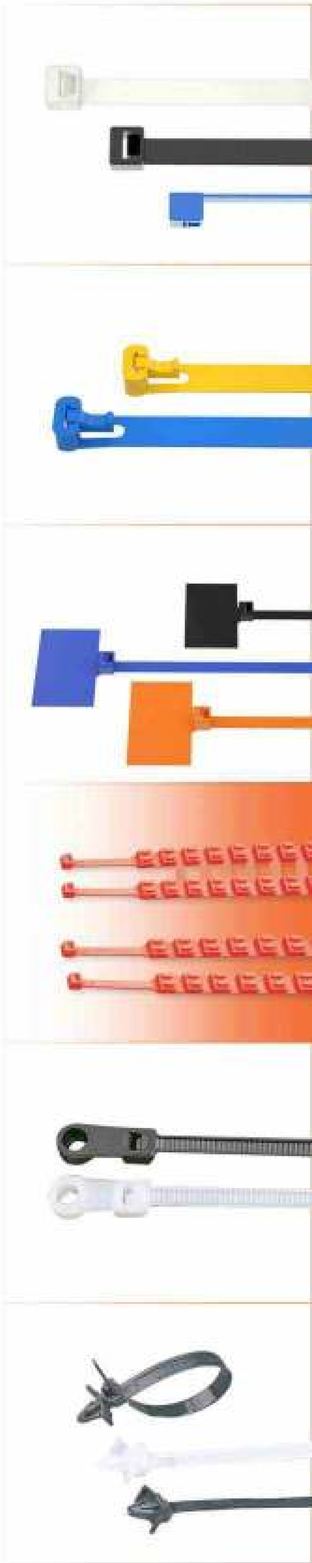

WENZHOU SHIJI IMP.&EXP. CO.,LTD.

Mountable Head Cable Ties

·Material Nylon 66, 94V-2 certificated by UL. Acid & erosion control, insulate well and not easy to aging tensile strong.
·Application temperature -40℃ to 85℃
·Installation temperature -20℃ to 85℃
·Color Natural, Black,UV black, other colors are available as requested.

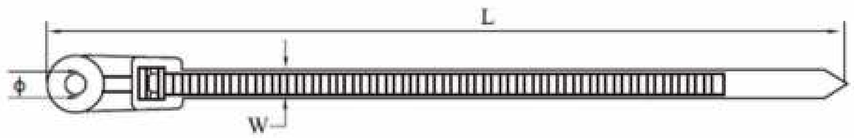

Item.no	Length		Width	Max.Bundle Dia. E	Hole Dia.	Tensile Strength	
	Inch	mm	mm	mm	mm	LBS	KGS
100MT	4 1/3"	100	3.6	22	4.5	18	40
150MT	6"	145	3.6	32	4.5	18	40
200MT	8"	220	4.3	42	5.5	22	50
380MT	15"	381	7.6	98	3.2	55	120

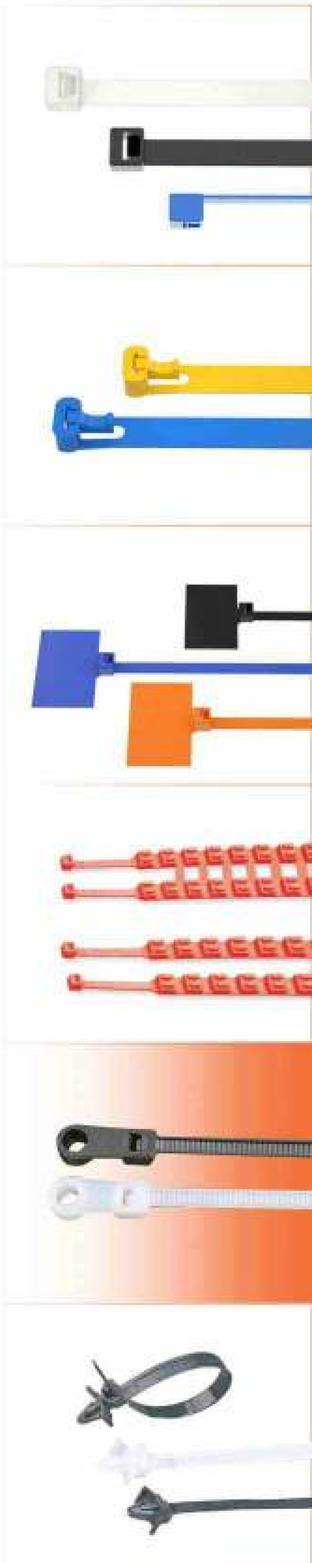

WENZHOU SHIJI IMP.&EXP. CO.,LTD.

Push Mount Cable Ties

·Material Nylon 66, 94V-2 certificated by UL. Acid & erosion control, insulate well and not easy to aging tensile strong.
·Application temperature -40℃ to 85℃
·Installation temperature -20℃ to 85℃
·Color Natural, Black,UV black, other colors are available as requested.





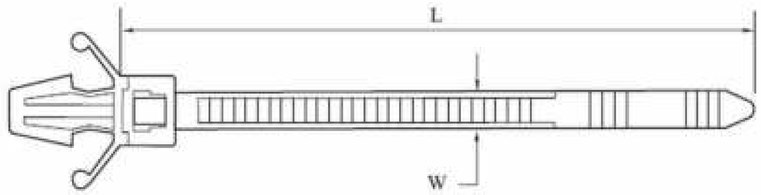

Item.no	Length		Width	Max.Bundle Dia. E	Tensile Strength		Hole Dia.		Panel Thickness	
	inch	mm	mm	mm	LBS	KGS	inch	mm	inch	mm
100PT	4″	100	2.5	22	18	8.0	0.189	4.8	0.094	2.4
150PT	43/4″	120	3.2	25	30	13.6	0.157	4.8	0.079	2.0
120PPT	43/4″	120	4.8	25	50	22.0	0.252	4.0	0.126	3.2
123PT	44/5″	123	3.5	26	40	18.0	0.157	4.0	0.079	2.0
160PT	61/4″	160	4.8	38	50	22.0	0.252	6.4	0.126	3.2
190PT	71/2″	190	4.8	45	50	22.0	0.252	6.4	0.126	3.2

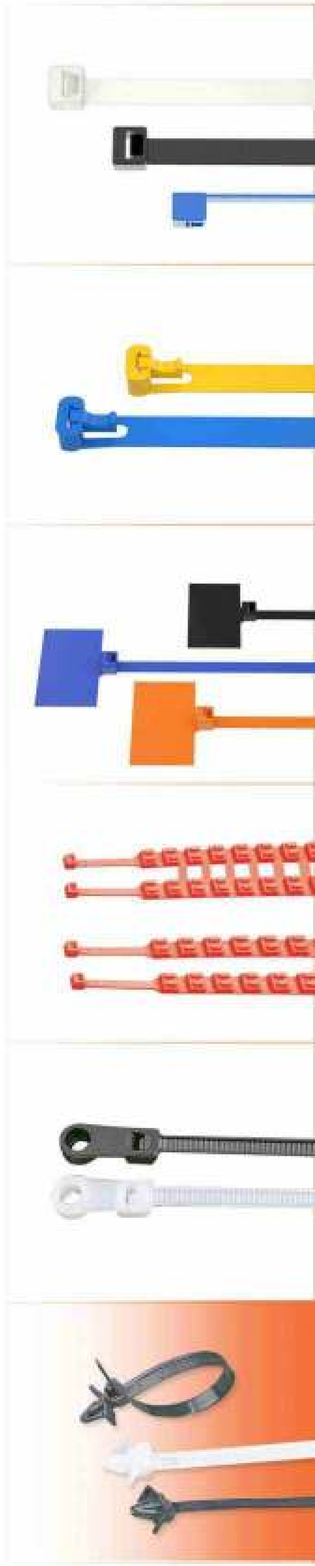

WENZHOU SHIJI IMP.&EXP. CO.,LTD.

Stainless Steel Cable Tie

- Material:Stainless steel type: 201,304,316, all length are available,special sizes can be customized;
- Characteristic:Acid-resisting, anti-corrosion, high tensile strength,simple and easy to use, etc.
- Application temperature:-60℃ to 150℃

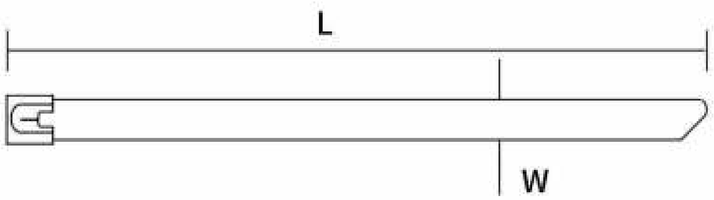

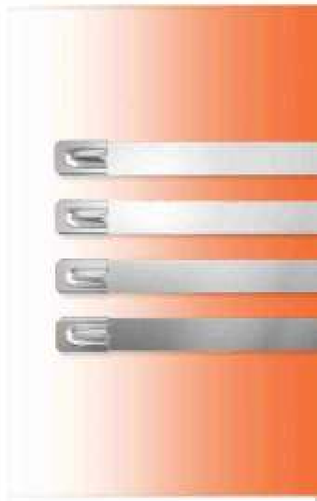

StainlessSteel Cable Tie

Item.no	Width	Length	Bundling range	Max.Bundle Dia.E	Standard packaging
	Unit:mm	Unit:mm	Unit:mm	Unit:kg	Unit:pcs
SCT- 4.6×100	4.6	100	22	60	100
SCT- 4.6×150	4.6	150	35	60	100
SCT- 4.6×200	4.6	200	50	60	100
SCT- 4.6×250	4.6	250	60	60	100
SCT- 4.6×300	4.6	300	65	60	100
SCT- 4.6×350	4.6	350	90	60	100
SCT- 4.6×400	4.6	400	105	60	100
SCT- 4.6×450	4.6	450	130	100	100
SCT- 4.6×500	4.6	500	150	100	100
SCT- 4.6×550	4.6	550	160	100	100
SCT- 4.6×600	4.6	600	170	100	100
SCT- 4.6×650	4.6	650	190	100	100
SCT- 4.6×700	4.6	700	200	100	100
SCT- 4.6×750	4.6	750	210	100	100
SCT- 4.6×800	4.6	800	240	100	100
SCT- 4.6×850	4.6	850	250	100	100
SCT- 4.6×900	4.6	900	258	100	100
SCT- 4.6×950	4.6	950	260	100	100
SCT- 4.6×1000	4.6	1000	270	100	100
SCT- 4.6×1050	4.6	1050	280	100	100
SCT- 4.6×1100	4.6	1100	290	100	100
SCT- 4.6×1200	4.6	1200	310	100	100
SCT- 4.6×1300	4.6	1300	330	100	100
SCT- 4.6×1400	4.6	1400	350	100	100
SCT- 4.6×1500	4.6	1500	370	100	100
SCT- 7.9×100	7.9	100	22	150	100
SCT- 7.9×150	7.9	150	35	150	100
SCT- 7.9×175	7.9	175	45	150	100
SCT- 7.9×200	7.9	200	50	150	100
SCT- 7.9×250	7.9	250	60	150	100
SCT- 7.9×300	7.9	300	65	150	100
SCT- 7.9×350	7.9	350	90	150	100
SCT- 7.9×400	7.9	400	105	150	100
SCT- 7.9×450	7.9	450	130	150	100
SCT- 7.9×500	7.9	500	150	150	100
SCT- 7.9×550	7.9	550	160	150	100
SCT- 7.9×600	7.9	600	170	150	100
SCT- 7.9×650	7.9	650	190	150	100
SCT- 7.9×700	7.9	700	200	150	100
SCT- 7.9×750	7.9	750	210	150	100
SCT- 7.9×800	7.9	800	240	150	100
SCT- 7.9×850	7.9	850	250	150	100
SCT- 7.9×900	7.9	900	260	150	100
SCT- 7.9×1000	7.9	1000	270	150	100

StainlessSteel Cable Tie

Item.no	Width	Length	Bundling range	Max.Bundle Dia.E	Standard packaging
	Unit:mm	Unit:mm	Unit:mm	Unit:kg	Unit:pcs
SCT- 7.9×1050	7.9	1050	280	150	100
SCT- 7.9×1100	7.9	1100	290	150	100
SCT- 7.9×1200	7.9	1200	310	150	100
SCT- 7.9×1300	7.9	1300	330	150	100
SCT- 7.9×1400	7.9	1400	350	150	100
SCT- 7.9×1500	7.9	1500	370	150	100
SCT- 10 × 150	10	150	35	200	100
SCT- 10 × 200	10	200	50	200	100
SCT- 10 × 250	10	250	60	200	100
SCT- 10 × 300	10	300	65	200	100
SCT- 10 × 350	10	350	90	200	100
SCT- 10 × 400	10	400	105	200	100
SCT- 10 × 450	10	450	130	200	100
SCT- 10 × 500	10	500	150	200	100
SCT- 10 × 550	10	550	160	200	100
SCT- 10 × 600	10	600	170	200	100
SCT- 10 × 650	10	650	190	200	100
SCT- 10 × 700	10	700	200	200	100
SCT- 10 × 750	10	750	210	200	100
SCT- 10 × 800	10	800	240	200	100
SCT- 10 × 850	10	850	250	200	100
SCT- 10 × 900	10	900	260	200	100

SCT- 7.9×1100	7.9	1100	290	150	100
SCT- 7.9×1200	7.9	1200	310	150	100
SCT- 7.9×1300	7.9	1300	330	150	100
SCT- 7.9×1400	7.9	1400	350	150	100
SCT- 7.9×1500	7.9	1500	370	150	100
SCT- 10 × 150	10	150	35	200	100
SCT- 10 × 200	10	200	50	200	100
SCT- 10 × 250	10	250	60	200	100
SCT- 10 × 300	10	300	65	200	100
SCT- 10 × 350	10	350	90	200	100
SCT- 10 × 400	10	400	105	200	100
SCT- 10 × 450	10	450	130	200	100
SCT- 10 × 500	10	500	150	200	100
SCT- 10 × 550	10	550	160	200	100
SCT- 10 × 600	10	600	170	200	100
SCT- 10 × 650	10	650	190	200	100
SCT- 10 × 700	10	700	200	200	100
SCT- 10 × 750	10	750	210	200	100
SCT- 10 × 800	10	800	240	200	100
SCT- 10 × 850	10	850	250	200	100
SCT- 10 × 900	10	900	260	200	100
SCT- 10 × 950	10	950	265	200	100

StainlessSteel Cable Tie

Item.no	Width	Length	Bundling range	Max.Bundle Dia.E	Standard packaging
	Unit:mm	Unit:mm	Unit:mm	Unit:kg	Unit:pcs
SCT- 10×1000	10	1000	270	200	100
SCT- 10×1050	10	1050	280	200	100
SCT- 10×1100	10	1100	290	200	100
SCT- 10×1200	10	1200	310	200	100
SCT- 10×1300	10	1300	330	200	100
SCT- 10×1400	10	1400	350	200	100
SCT- 10×1500	10	1500	370	200	100
SCT- 12×150	12	150	35	250	100
SCT- 12×200	12	200	50	250	100
SCT- 12×250	12	250	60	250	100
SCT- 12×300	12	300	65	250	100
SCT- 12×350	12	350	90	250	100
SCT- 12×400	12	400	105	250	100
SCT- 12×450	12	450	130	250	100
SCT- 12×500	12	500	150	250	100
SCT- 12×550	12	550	160	250	100
SCT- 12×600	12	600	170	250	100
SCT- 12×650	12	650	190	250	100
SCT- 12×700	12	700	200	250	100
SCT- 12×750	12	750	210	250	100
SCT- 12×800	12	800	240	250	100
SCT- 12×850	12	850	250	250	100
SCT- 12×900	12	900	260	250	100
SCT- 12×950	12	950	265	250	100
SCT- 12×1000	12	1000	270	250	100
SCT- 12×1050	12	1050	280	250	100
SCT- 12×1100	12	1100	290	250	100
SCT- 12×1200	12	1200	310	250	100
SCT- 12×1300	12	1300	330	250	100
SCT- 12×1400	12	1400	350	250	100
SCT- 12×1500	12	1500	370	250	100
SCT- 16×250	16	250	60	320	100
SCT- 16×300	16	300	65	320	50
SCT- 16×350	16	350	90	320	50
SCT- 16×400	16	400	105	320	50
SCT- 16×450	16	450	130	320	50
SCT- 16×500	16	500	150	320	50
SCT- 16×550	16	550	160	320	50
SCT- 16×600	16	600	170	320	50
SCT- 16×650	16	650	190	320	50
SCT- 16×700	16	700	200	320	50
SCT- 16×750	16	750	210	320	50
SCT- 16×800	16	800	240	320	50
SCT- 16×850	16	850	250	320	50

StainlessSteel Cable Tie

Item.no	Width	Length	Bundling range	Max.Bundle Dia.E	Standard packaging
	Unit:mm	Unit:mm	Unit:mm	Unit:kg	Unit:pcs
SCT- 16 × 900	16	900	260	320	50
SCT- 16 × 950	16	950	265	320	50
SCT- 16 × 1000	16	1000	270	320	50
SCT- 16 × 1050	16	1050	280	320	50
SCT- 16 × 1100	16	1100	290	320	50
SCT- 16 × 1200	16	1200	310	320	50
SCT- 16 × 1300	16	1300	330	320	50
SCT- 16 × 1400	16	1400	350	320	50
SCT- 16 × 1500	16	1500	370	320	50

Stainless steel cable ties and reels

- Material: stainless steel 201, 304, 316;
- Length: various lengths can be made (special provisions are made according to customer's sample)
- Characteristics: Acid resistance, corrosion resistance high tensile strength

Item.no	Width	Bundling range	Standard packaging
	Unit:mm	Unit:mm	Unit:pcs
SRT-4.6	4.6	0.24	50 100
SRT-6.4	6.4	0.4 0.5	30 50
SRT-7.9	7.9	0.25	50 100
SRT-9.5	9.5	0.5	30 50
SRT-10	10	0.25	50 100
SRT-12	12	0.25 0.4 0.5	30 50
SRT-12.7	12.7	0.5 0.76	30
SRT-16	16	0.25 0.5 0.76	30
SRT-19	19	0.4 0.5 0.7 0.76	30
SRT-21	21	1	30
SRT-23	23	0.5	30

RTP-6.4	6.4	0.5 0.8 1.0	200
RTP-8	8	0.5	200
RTP-10	10	1.0 1.2	100
RTP-12.7	12.7	1.2 1.5	100
RTP-16	16	1.2 1.5 1.8	100
RTP-19	19	1.5 1.8	100
RTP-25	25	1.8	50
LTP-6.4	6.4	0.7	200
LTP-8	8	0.7	200
LTP-10	10	0.7	200
LTP-12.7	12.7	0.7	100
LTP-16	16	0.7	100
LTP-19	19	0.5 0.9	100

Circle Cable Clips

- **PE(white, grey), high elasticity, impact resistance.**
- **Inserting type, nail attached in clips.Save time and cost.**

Item.no	High	Diameter	Nail
	mm	mm	mm
ZGS-CC3	4	3	1.7×15
ZGS-CC4	4.8	4	1.7×15
ZGS-CC5	5.6	5	1.7×15
ZGS-CC6	7.9	6	1.8×16
ZGS-CC7	9.2	7	1.8×18
ZGS-CC8	9.7	8	1.9×19
ZGS-CC9	10.9	9	2.0×20
ZGS-CC10	12.4	10	2.0×22
ZGS-CC12	14.8	12	2.0×25
ZGS-CC14	17.6	14	2.3×30
ZGS-CC16	18	16	2.3×30
ZGS-CC18	19	18	2.5×38
ZGS-CC20	22	20	2.5×38
ZGS-CC22	25	22	2.8×40
ZGS-CC25	27.3	25	2.8×40
ZGS-CC30 (Double Nail)	33	30	3.0×52
ZGS-CC32 (Double Nail)	35	32	3.0×52
ZGS-CC35 (Double Nail)	36.6	35	3.0×57
ZGS-CC40 (Double Nail)	45.2	40	3.0×60
ZGS-CC50 (Double Nail)	54	50	3.5×75

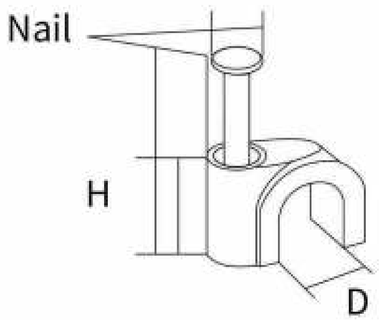

Self-adhesive Tie Mounts

- Material: ABS、Nylon 66, 94V-2 ,certificated by UL, the back attached sponge glue imported .
- Usage: Peel the sponge glue and stick on the wall then, bundle the wire with cable ties.
- Application: for bundling wires and other things save time and convenient , used for the wall which can't be made a hole in.

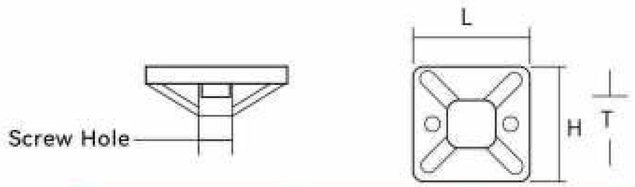

Item.no	L×W	H	T	Screw Hole
	mm	mm	mm	mm
ZGS-TM20	20×20	6.1	5.0	2.9
ZGS-TM25	25×25	7.5	6.2	3.5
ZGS-TM30	30×30	8.7	6.4	4.5
ZGS-TM40	40×40	6.4	10.8	/

R-type Cable Clamps

- Material: Nylon 66 94v-2 agreed by UL.
- Usage: put cable in, fix by screw.

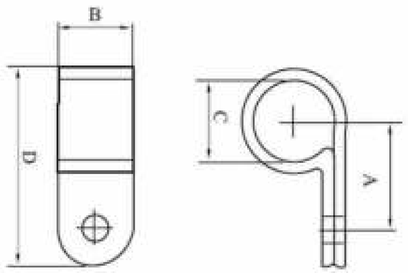

Item.no	A	B	C		D
	mm	mm	mm	inch	mm
1/8R	9.5	9.6	3.2	1/8"	19.8
3/16R	9.6	9.6	4.8	3/16"	19.8
1/4R	12.0	10.0	6.35	1/4"	22.0
5/16R	12.0	10.0	7.9	5/16"	22.0
3/8R	12.5	12.0	9.5	3/8"	24.0
1/2R	15.2	12.0	12.7	1/2"	31.0
5/8R	18.2	12.0	15.8	5/8"	34.3
3/4R	18.2	12.0	19.4	3/4"	35.0
1R	22.0	12.0	25.4	1"	43.0

Spiral Wrapping Bands

- Material: made from PE.
- Usage: fix one end with safety belt first, then circle the wires clockwise to make them tighen.
- Application: a protection wear for electric wires, and make them insulation and look nice.

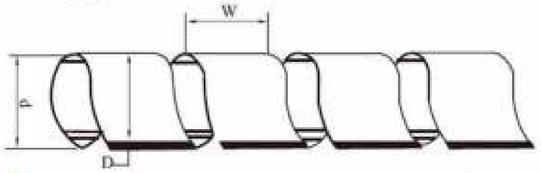

Item.no	Inner diameter (D)	Outer diameter (D)	Pitch (W)	Wrapping Range	Packing
	mm	mm	mm	Inch	M/ROLL
SWB-04	2.5	4	4.5	2×20	25
SWB-06	4	6	7.0	4×50	15
SWB-08	6	8	10.8	6×50	12
SWB-10	7.5	10	11.4	7.5×60	9
SWB-12	9	12	13.9	9×65	7
SWB-14	11	14	14.5	12.5×60	6
SWB-16	13	16	16	13×85	5
SWB-18	14	18	17	14×90	4
SWB-20	17	20	18.5	16×105	3
SWB-24	20	24	19.6	20×130	2.5
SWB-26	22	26	20	22×135	2.5
SWB-28	24	28	28	24×140	1.5
SWB-30	26	30	43	26×150	1.5
SWB-50	45	50	62	45×200	0.5

Spiral Cable Zip Wrap

- Material: made from PE.
- Application: a protection wear for electric wires, and make them insulation and look nice.

Item.no	Inner diameter	Packing
	mm	M/ROLL
CHT-08	8	100
CHT-10	10	100
CHT-16	16	100
CHT-22	22	50
CHT-28	28	40
CHT-32	32	30
CHT-40	40	20



WENZHOU SHIJI IMP.&EXP. CO.,LTD.

AIR PU HOSE

- Colours: custom colours, red, blue, black, transparent
- Material: Polyurethane TPU
- Hardness: 95A~98A
- Applicable temperature: -20~60℃
- Abrasion resistance: 35MG
- Instant burst pressure: 36kg (3.6MPA)
- Tear strength: 110KG/CM2

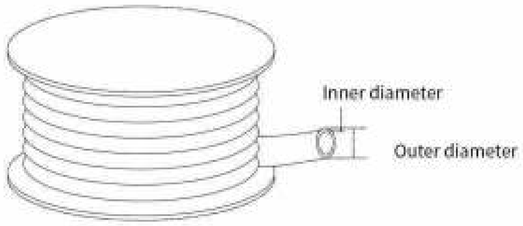

Item.no	Outer diameter (D)	Inner diameter (D)	Length	Min. bend radius	Work stress
	mm	mm	mm	mm	MPA
PU-3	3	2	200	10	0-10
PU-4	4	2.5	200	10	0-10
PU-6	6	4	200	15	0-10
PU-8-5.5	8	5.5	100	20	0-10
PU-8-5	8	5	100	20	0-10
PU-8-6	8	6	100	20	0-10
PU-10	10	6.5	100	30	0-10
PU-12	12	8	100	35	0-10
PU-14	14	10	100	55	0-10
PU-16	16	21	100	65	0-10

WENZHOU SHIJI IMP.&EXP. CO.,LTD.

NCT2 Nylon cable ties Take-up Tools

·Suitable for fast bind wire and cable automatic cut-and -bind left part

Item.no	Length	Weight	Applicable tie width
	mm	KG	mm
ZGS-NCT2	165	0.30	2.4-4.8

NCT1 Nylon cable ties Take-up Tools

·Suitable for fast bind wire and cable automatic cut-and -bind left part

Item.no	Length	Weight	Applicable tie width
	mm	KG	mm
ZGS-NCT1	195	0.26	2.4-9.0

SCT1 StainlessSteel Cable Tie Take-up Tools

- For metal stainless steel ties
- Tie and cut in one

Item.no	Length	Weight	Applicable tie width
	mm	KG	mm
ZGS-SCT1	165	0.60	0.3-7.9

SCT2 StainlessSteel Cable Tie Take-up Tools

-For quick bundling of cables and wires
-Manual cutting of the remaining part of the cable ties
-Tie and cut in one

Item.no	Length	Weight	Applicable tie width
	mm	KG	mm
ZGS-SCT2	210	0.56	4.6-12

ZHEJIANG ZHONGGU PLASTIC CO., LTD.
&
WENZHOU SHIJI IMP.&EXP. CO.,LTD.

SALES CENTER
WENZHOU SHIJI IMP.&EXP. CO.,LTD.
info@shijizgs.com

ZHEJIANG ZHONGGU PLASTIC CO.,LTD.
info@groupzgs.com

BUILDING B5,WEST INDUSTRIAL ZONE
FANGDOUYAN VILLAGE LIUSHI TOWN
YUEQING CITY,WENZHOU CITY
ZHEJIANG PROVINCE CHINA